

## DD Series DC-DC Power Supply

### INSTRUCTIONS FOR USE

The following instructions apply to the 72/110V products in the DDi range.


**NOTE: This product should only be installed by qualified personnel**

Your PowerMaster product is supplied ready to be wired into the appropriate DC supply. The unit should be situated away from sources of heat or damp and can easily be situated on top of a desk or bench – see figure A. The unit should be connected in the following order – see fig. A.

1. Before commencing the installation ensure that the input power supply is switched off
2. Connect the ground terminal to the ground lead on the load.
2. Connect the red +ve terminal to the + (red) lead on the load.
3. Connect the black -ve terminal to the – (black) lead on the load.
4. Wire the input power cable to the appropriate DC supply:  
Red +ve, Black –ve Green/Yellow E

Alternatively the unit can be fitted *out of the way* using the mounting screw holes provided.

1. Select a cool, dry and ventilated position. Do not cover fan or ventilation holes. Mount unit horizontally or vertically (if vertically the fan must face upwards).
2. Use the unit to mark the position of the four holes.
3. Drill 4x 3.5mm holes.
4. Secure the unit using the screws provided.
5. Connect the wires according to the instruction given above.

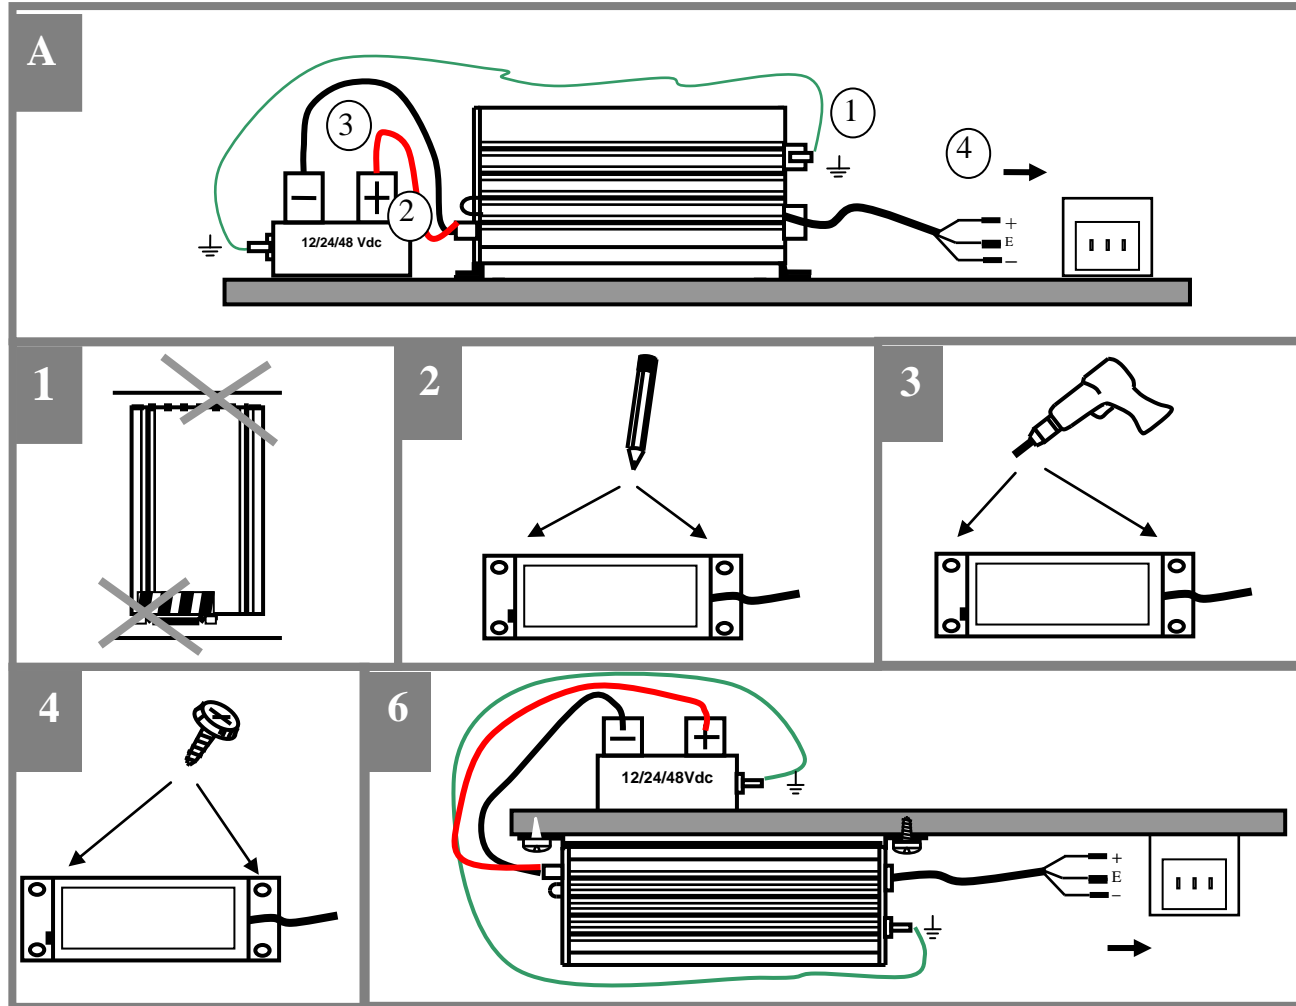

Tel. +44 (0) 1202 715 517  
Fax +44 (0) 1202 715 122  
Email [sales@alfatronix.com](mailto:sales@alfatronix.com)  
Website [www.alfatronix.com](http://www.alfatronix.com)  
Address 29 Newtown Business Park,  
Poole, Dorset, BH12 3LL