

POWERVERTER

DUAL OUTPUT 24VDC TO 12VDC CONVERTERS

PV-A RANGE DUAL OUTPUT CONVERTERS WITH SWITCHED OUTPUT

Some automotive equipment, such as In Car Entertainment (ICE) usually has two links to the vehicle's electrical system, one for memory back-up and one for switching the equipment on and off.

The on/off function is controlled from the ignition switch so that when the ignition key is removed, the ICE equipment is turned off, preventing the battery from becoming discharged whilst leaving the memory back-up circuit still active.

Also, some truck manufacturers run other 12V equipment, such as a cigar lighter socket from the same feed, while others prefer to leave it permanently on.




Alfatronix have developed three voltage converters, a 3Amp, 6Amp (continuous) and a 12A (continuous), which overcome these configuration problems. The Alfatronix converters mimic the 12V battery and 12V ignition function by providing two outputs, either of which can provide full power. One output is available whenever the 24V battery is connected. The other output is switched by the 24V ignition switch. Now the ICE equipment can be fitted to the 24V truck as simply as fitting it to a 12V car.

Of course, the Dual Output Range can be used for any application where a dual output is required or where a switched and permanent or memory connection must be retained.


The PV12s-A is ideal for powering in car entertainment systems where a permanent memory circuit is required for security purposes.




The PV3s-A is ideal for smaller applications where a switched and permanent circuit are both required.



TYPICAL APPLICATIONS

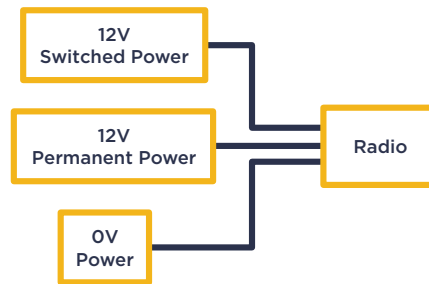

THE ALFATRONIX SOLUTION

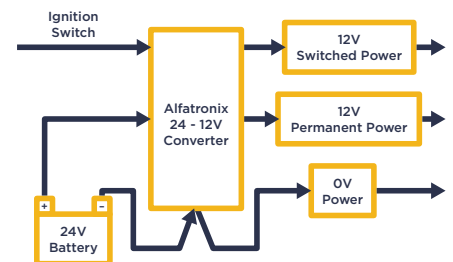

CONNECTION SOLUTIONS



PV12s-A Connections

Pin No.	Colour	Description
1	Red	+12Vdc Switched Output
2	Yellow	+12Vdc Permanent Output
3	White	0Vdc Output
4	Blue	0Vdc Input
5	Green	+24Vdc Input
6	Brown	+24Vdc Ignition Switch Input

CHOOSE YOUR PV-A RANGE PRODUCT

Part Number	Cont/Int Current	Nominal Voltage	Power Rating	Dimensions	Weight
PV3s-A	3A/6A non-isolated	24Vdc input, 12Vdc output	36W	67 x 87 x 50mm	200g
PV6s-A	6A/10A non-isolated	24Vdc input, 12Vdc output	72W	89 x 87 x 50mm	250g
PV12s-A	12A/15A non-isolated	24Vdc input, 12Vdc output	144W	126 x 87 x 50mm	455g

TECHNICAL DATA

Input voltage range	17-32Vdc								
Output voltage	13.6Vdc +15% -20% at extremes of temperature, load, input tolerance, etc.								
Output power	As stated, from either output or combination of both. Intermittent ratings as stated, taken for a maximum of 2 minutes followed by 8 minutes rest.								
Transient voltage protection	Meets ISO7637-2 International standard for 24Vdc commercial vehicles								
Electrostatic voltage protection	Meets ISO10605, ISO14982, >8kV contact, 15kV discharge								
Output noise	<50mV pk-pk at continuous load. Meets CISPR25 and VDE0879-3								
Off load current (quiescent current)	<15mA								
Power conversion efficiency	Typically: 90%								
Operating temperature	-25°C to +30°C to meet this specification table +30°C to +80°C de-rate linearly to 0A								
Storage temperature	-25°C to +100°C								
Operating humidity	95% max., non-condensing								
Casework	Anodised aluminium, glass filled polycarbonate, dust water and impact resistance to IP533								
Connections	Five 6.3mm push-on flat blade connectors 6-way 070 connector (PV12s-A)								
Output indicator	Green LED adjacent to output terminals, None on PV12s-A								
Mounting method	'Click 'n' fit mounting clip, fitted separately using three hole fixing								
Safe area protection:	<table border="0"> <tr> <td>Over current</td> <td>Limited by current sensing circuit</td> </tr> <tr> <td>Over heat</td> <td>Limited by temperature sensing circuit</td> </tr> <tr> <td>Transients</td> <td>Protected by filters and rugged component selection</td> </tr> <tr> <td>Catastrophic protection</td> <td>Protected by internal input and output fuses</td> </tr> </table>	Over current	Limited by current sensing circuit	Over heat	Limited by temperature sensing circuit	Transients	Protected by filters and rugged component selection	Catastrophic protection	Protected by internal input and output fuses
Over current	Limited by current sensing circuit								
Over heat	Limited by temperature sensing circuit								
Transients	Protected by filters and rugged component selection								
Catastrophic protection	Protected by internal input and output fuses								
Approvals	2014/30/EU The general EMC directive Regulation 10 The automotive directive 93/68/EEC The CE marking directive								
Markings	CE, UKCA and E (automotive) marked								